



STONE POLYMER COMPOSITE

GOLDENELITEGROUP.COM.AU



Golden Elite Group



Proud to be a Member of the

atfa[®]
Australian Timber Flooring Association
Local professionals, world-class standards


SUPERIOR SCRATCH
RESISTANCE



PET PROOF



INSTALLATION
ON ANY SURFACE



SOUND
REDUCING PAD



FAST & SECURE
CLIP SYSTEM



100% WATER
PROOF



STONE POLYMER COMPOSITE

A Sustainable Flooring Solution

- Eco-Friendly
- Quick and Easy to Install
- Click System
- 100% Waterproof
- Acoustic Qualities
Sound Reducing Attached Underlay
- Good Foot Feel
- Durable, Easy to Clean / Maintain
- 25-Year Residential Warranty;
5-Year Commercial Warranty
- Formaldehyde free, Pet friendly
- No scratches, High heel safe - no dents



WHY SPC ?

Waterproof

100% waterproof, can be installed in kitchens, bathrooms, laundry rooms and restaurants without any worries!

Stability

The SPC vinyl core is more stable in environments with temperature changes, such as cabins, homes with AC units and homes with humidity fluctuations.

Comfort, Healthy & Quiet

Formaldehyde free.

100% natural cork backing makes SPC sturdier, cushioned and softer under foot than a traditional vinyl. No hollow sound when walking on it.

Click-installation system

40% faster to install than glue down floors. It is installed similarly to a regular vinyl and laminate with a click-system installation. No glues or extra tools are required!

Affordability


Budget friendly. No further spending on underlay as it can be installed as-is on the subfloor. Saves time on installation. Makes DIY flooring jobs easier.

Easy Maintenance



Designed to be easily cleaned with regular sweeping and mopping. Same cleaning and maintenance needs as a regular vinyl.

Hardwood Appearance

A variety of looks, textures and styles. SPC can be fitted in bathrooms, kitchens, yoga / fitness studios etc.

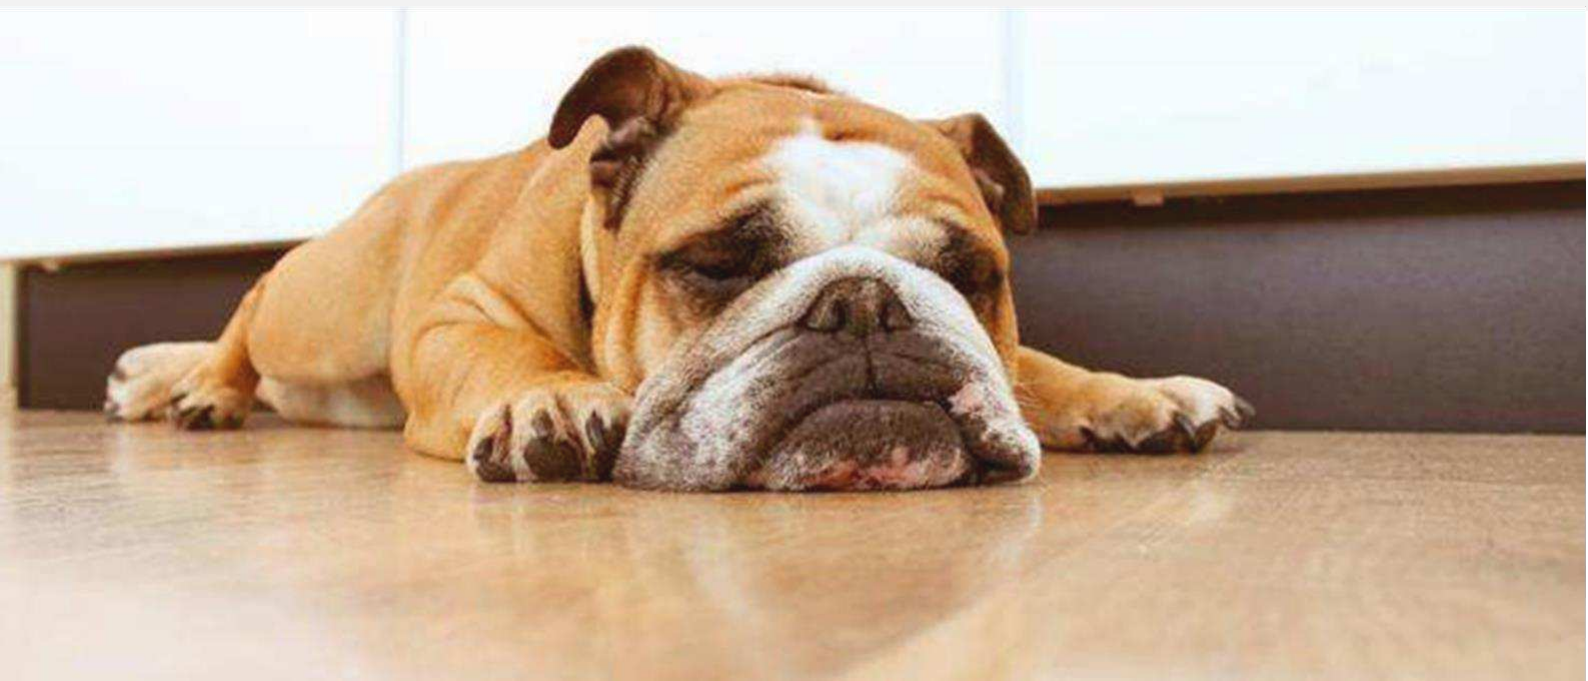

SPC COLOUR RANGE



PROJECT GALLERY

Project Location
Victoria Point
Finish Date
October 2019



GESPC0704
SPC Smoulder

PROJECT GALLERY



Project Location
Gold Coast
Finish Date
January 2020



GESPC0709
SPC Aged Oak

SPECIFICATIONS

SPC	
PLANK THICKNESS	7MM
PLANK SIZE	1500MM X 183MM
BOX	8 PCS
AREA PER BOX	2.20M ²

TECHNICAL DATA	
TYPE	HYBRID
COLOURS	13
BACKING LAYER	1.5MM ACOUSTIC CORK
SUBSTRATE LAYER	ENGINEERED RIGID CORE
TOP LAYER	DURABLE WEAR LAYER
PROTECTIVE COATING	CERAMIC MATT UV COATING
INSTALLATION METHOD	CLICK SYSTEM



TEST REPORT



TEST REPORT		
TEST ITEM	DATA / CONCLUSION	
WET PENDULUM TEST	SLIP RESISTANCE VALUE: 40	CLASS: P3
FIRE TEST	MEAN VALUE: 8.6 kW/M ²	CHARRING
LOCKING STRENGTH	659.2N / 1209N	
ABRASION RESISTANCE	PASS	SWELLING: 0-0.1%
DBP/ BBP/ DEHP/ DIBP/ DNOP/DMP/ DPhP/ DnHP/ DEP CONTENT(S)	PASS	
PEEL STRENGTH	37.7N/25mm	PASS
MIGRATION OF CERTAIN ELEMENTS	PASS	
RESISTANCE TO SURFACE WEAR	PASS	
COLOUR FASTNESS TO LIGHT	BETTER THAN 6 GRADE (B.W.S)	
FORMALDEHYDE	0.003 MG/M ³	E0
OTHER VOLATILE ORGANIC COMPOUNDS	NOT DETECTABLE	PASS
ACOUSTIC TEST	L'nT,w: 52 / FIIC: 51	PASS



Address: 2/231 Holt St, Pinkenba QLD 4113

Email: orders@goldenelitegroup.com.au

<http://www.goldenelitegroup.com.au>

<http://en.newpearl.com>